


F18




Versions



35.5 inches / 902 mm

2 group


- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

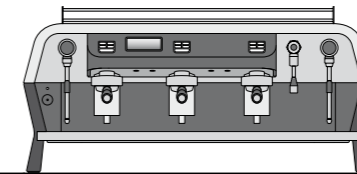



42.2 inches / 1072 mm

3 group

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters

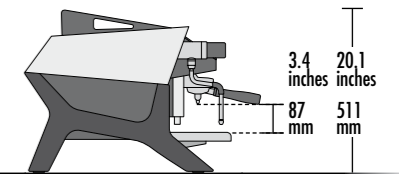


25.5 inches / 646,5 mm

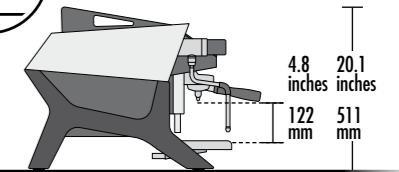

4.8 inches / 122 mm
20.1 inches / 511 mm



TALL VERSION

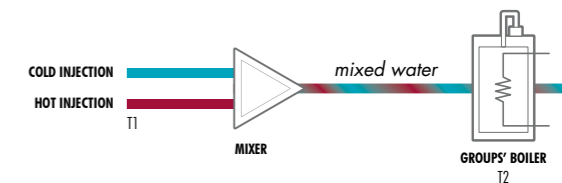

MULTIBOILER SYSTEM

Each group has a dedicated boiler powered by preheated water thanks to the mixing of cold and hot water coming from the heat exchangers; the group is kept at the ideal temperature by a specific resistor, which ensure a perfect thermal regulation.



Technical data		2 group	3 group
voltage	V	220-240 1N	380-415 3N
power input	kW	6.32	7.2
steam boiler capacity	US gal / lt	2.27 / 8.6	2.64 / 10
steam boiler power	kW	3.5	3.5
pump power	kW	0.15	0.15
boiler capacity	US gal / lt	0.26 / 1	0.39 / 1.5
boiler element power	kW	1	1.5
cup-heater power	kW	0.2	0.25
net weight	lb / kg	214 / 97	265 / 120

Colors

	Black Matte black	RAL 9005
	White Black	RAL 9003 9005
	Blue Matte black	RAL 5024 9005



QUICK STEAM COUPLING

The new half-turn knob allows extreme precision limiting physical stress



ENERGY SAVING SYSTEM

Insulation and energy saving system up until 40% compared to single boiler machines



STAINLESS STEEL "COLD TOUCH"

Anti-burning feature fitted with "Latte Art" high-performance steam terminals

REALTIME STABILITY GROUP

Exclusive Sanremo design that allows an accurate maintenance of the set temperature



REALTIME STABILITY

Constancy in the electronic controlled temperature (± 0.2 °C)

In flight stability

Ready to take off



OPERATION ALARM MANAGEMENT


Dedicated menu for malfunction and alarm records

SOFT PRE-INFUSION

Flowactive System: for precise control of the water flow and pre-infusion time



Control panel:

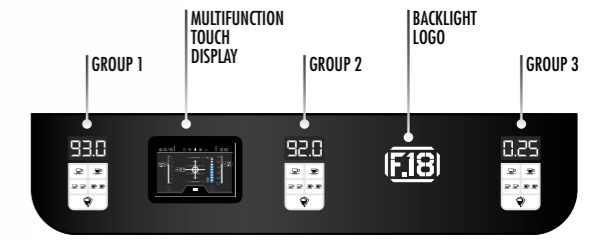

Tastiera 5 selezioni standard




TEMPERATURE AND EXTRACTION TIME




5/6 PROGRAMMABLE DOSES

Keyboard 7 selections optional



MULTIFUNCTION TOUCH DISPLAY

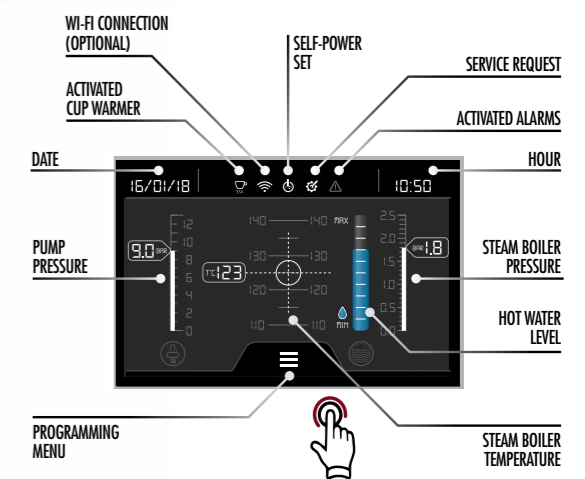

Characteristics

- MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS**
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.
- STATIC RELAY BOILER TEMPERATURE**
Allows to regulate the temperature as accurately as possible.
- STAINLESS STEEL COFFEE BOILER**
Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.

- INDEPENDENT REGULATION TEMPERATURE WATER COFFEE**
Maximum temperature precision and constancy of distribution.
- PROGRAMMABLE ELECTRONIC PRE-INFUSION**
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.
- AISI 316L STAINLESS STEEL STEAM WAND "COLD TOUCH"**
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

 **F18**
Link to the website

- PROGRAMMABLE CUP WARMER TEMPERATURE**
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.
- LED LIGHTING OF THE WORK AREA**
Allows efficient working in any condition of environmental lighting.
- AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION**
Programmable on-off timer for each day and/or daily timetables.

- ENERGY SAVING SYSTEM**
Insulation and energy saving system up until 40% compared to single boiler machines.
- REALTIME STABILITY GROUP**
Exclusive Sanremo design that allows a precise maintenance of the set temperature.
- EASY SERVICE**
Fast access to the internal parts for quick and easy technical service.
- AUTOMATIC CLEANING CYCLE**
Process for coffee groups cleaning.

- HIGH PERFORMANCE VOLUMETRIC PUMP**
Pressure stability also with prolonged and contemporary use of more than one group.
- COMPETITION FILTERS**
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.
- TEMPCONTROL**
For a very-high thermal stability (± 0.2 °C).
- GROUP FLUSHING**
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

Optional

- AUTOSTEAM**
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.
- EXTERNAL VOLUMETRIC PUMP**
- HIGH POWER STEAMER TERMINAL**
(bigger holes diameter)
- NAKED PORTAFILTERS**